
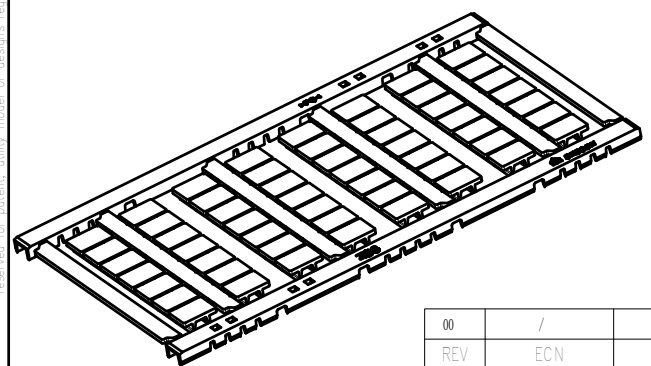
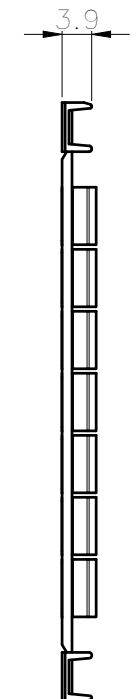


未注公差/General tolerances(mm)													
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
间距/Pitch(mm) / 线数范围 / Poles											8.2/N=56P		
使用温度范围/Operating temperature(°C)											-40~+110		
符合 RoHS 环保要求 / Conform to RoHS											Yes		

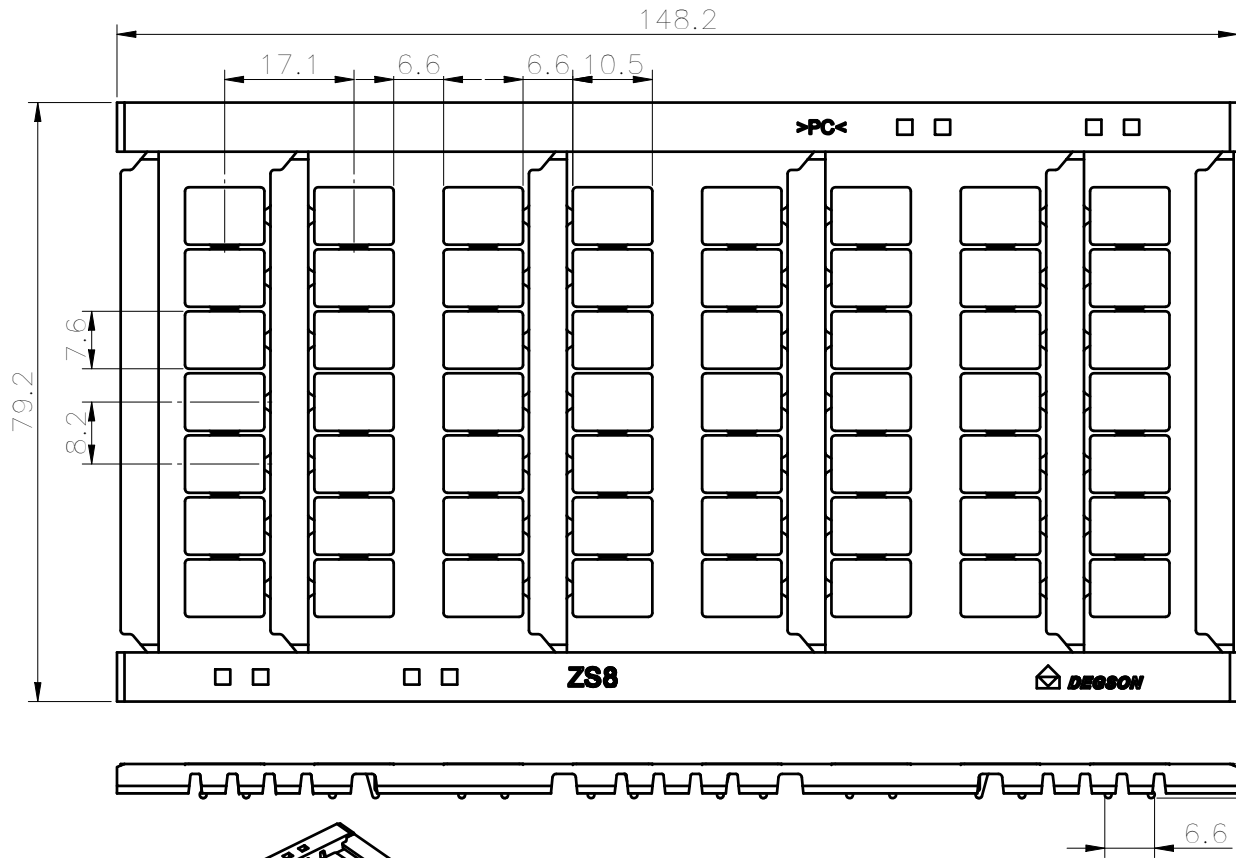

		MATERIAL: PC	SURFACE: /	
		MAT. NO./REV: /	MAT STATUS: /	
APPD: Peng M	2022.06.08	NAME		
CHKD: Gao WG	2022.06.08	ZS8-56P-1Y-00A (H)		
DRFT: Chen KZ	2022.06.08	DRAWING NO. /	TYPE	DRAWING STATUS
		CUSTOMER DRAWING		SCALE
				1:1
				SHEET
				1/1

00	/	/	Chen KZ	2022.06.08
REV	ECN	DESCRIPTION	DRFT	DATE

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Customers will be liable for compensation. All rights reserved for patent, utility model or designs registrations. 非经明确授权, 否则禁止转让、复制、利用、交加本文件的内容, 一经发现将追究法律责任, 侵权者将承担全部责任, 实用新型和外观设计的所有权利。